

The filter media professionals


PRODUCT DATA SHEET

Product: **#6 (1.5-3.0 mm NOM +/-8%)**

Appearance: Dry sand, graded to the above specification

Main Applications: Filtration Medium

Indicative Grade Analysis: Sieve Standards: ASTM C136, AS1141.11, AWS App B
 Sampling Methods: ASTM D75, AS1141.3.1

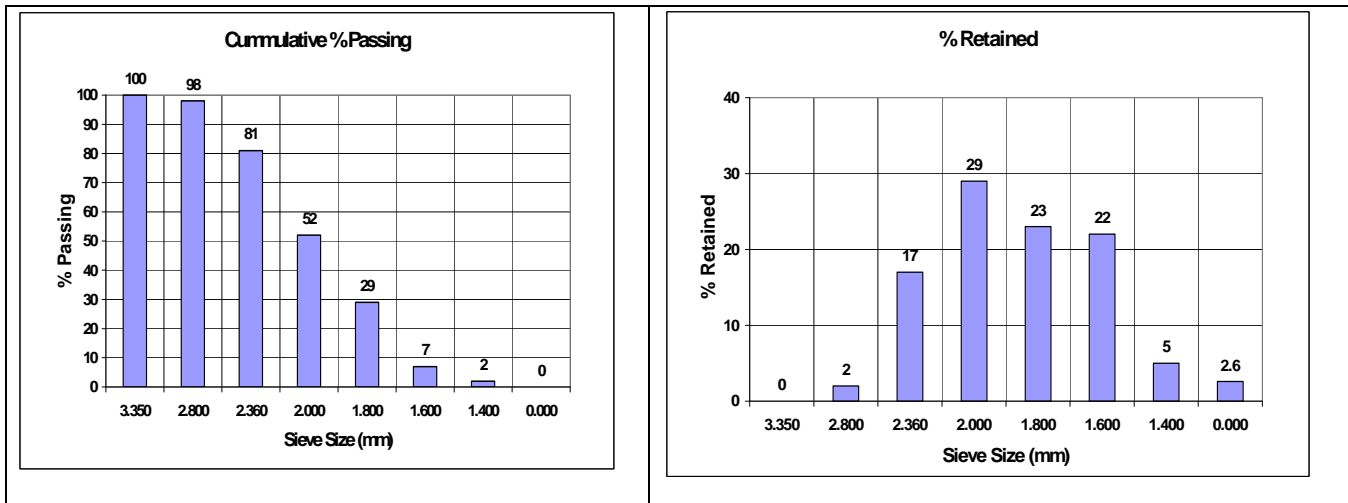

Note: Indicative grading only. Grading analysis will vary slightly over time due to changes in raw feed.

Other Properties

Moisture Content <5%
Bulk Density approx. 1.4 t/m³
Acid Solubility <1%
Material <75 µm <1%
Specific Gravity >2.5

Test Methods

AS 1289.2.1.1
 AS1141.4, AWS App D
 AWWA-B100 (50% HCl)
 ASTM C117, AS1141.12
 ASTM C128, AS 1141.5

River Sands operates and maintains a Quality Certified system in accordance with AS/NZS ISO 9001

The Quality system is third party certified by NATA.

River Sands also maintains a registered NATA laboratory.

Registration # 6898

Registration # 10470